

# Site Surveying and Antenna Mounting

Abdus Salam ICTP, February 2006

## **School on Wireless Networking for Development**

Ermanno Pietrosemoli

Latin American Networking School

(Fundación EsLaRed) – ULA

Mérida Venezuela      [www.eslared.org.ve](http://www.eslared.org.ve)



# Session Overview

- Site survey
- Antenna mounting requirements
- Wall side mounts
- Roof mounts
- Guyed towers
- Self supporting tower
- Typical installation




# LUGARES DE INTERES

- 1 MUSEO PALEONTOLOGICO, con la exhibición de fósiles encontrados en la región.
- 2 HIPÓDROMO DE LA VILLA, área de reunión de la élite local.
- 3 Iglesia del SANTUARIO DE PAUNA Y EL DO, SAN PEDRO DE HUASQUE, por la ruta del valle de la Iguala hacia la cabecera Chiriquí.
- 4 Iglesia en Testimonio por la cabecera Chiriquí, centro de oraciones y veneración hacia la LAGUNA DE HUASQUE, centro de la comunidad, según la Mitología Muisca. Señales hacia otras lagunas.
- 5 Baño en las aguas del río Caca en el POZO DE LA VIEJA.
- 6 RUINAS DE SACHANTIVA VIEJO, antiguo asentamiento de Sachantiva, hoy pueblo fantasma.
- 7 Cascada de LA PERQUERA, y sendero hacia zona boscosa, aguas abajo del río La Caca.
- 8 OEL FOSIL, Conocimiento de 120 millones de años.
- 9 RUINAS DE LA IGLESIA DE MONQUIA, construida en 1553.
- 10 PARQUE ARQUEOLOGICO EL INFIERNITO, construcciones muisca precolombinas.
- 11 Antigua MOLINO LA PRIMAVERA, en las vegas del río Caca.
- 12 MONASTERIO DEL SANTO ECCE-HOMO, fundado en 1620 por los Padres Dominicos.
- 13 CUEVA DE LA FERRICIA, con diversos asentamientos de sectores de metros.
- 14 Hoyo de LA ROMERA, mirador natural.
- 15 CUEVA DEL HAYAL, en una impresionante cascada de la quebrada Sotocorral.
- 16 DACIÓN DEL RIO MONQUIA y sendero panorámico con vista a la CASCADA DEL HAYAL.
- 17 MINAS DE MARMOL, sales verde, verde y roja.
- 18 AGUAS TERMALES, propias para el baño.
- 19 Sendero panorámico hacia el BASIS Y EL DESIERTO DE LA CANDELARIA.
- 20 RAGUERA, sector artesanal.
- 21 MONASTERIO DE LA CANDELARIA, fundado en 1604 por los Padres Agustinos.
- 22 Sendero panorámico, antecesor a las cataratas en la PRESION DEL LOCO, la banca de un antiguo arroyo a Tunja y el pueblo de CHIGUIZA, con vestigio iglesias antiguas.

## CONVENCIONES

- Número de Ruta
- Lugares de Interés
- Vías principales
- Vías secundarias
- • • Sendero panorámico
- ⌋ Puente
- ⌋ Sítio
- ⌋ Cementerio
- ⌋ Estación de Servicio
- ⌋ Vía panorámica
- ⌋ Ríos y quebrados
- ▲ Alturas



GPS

Compass

# Site Survey tools

Map, altimeter, laptop with RSL software

Binoculars or Telescope

CARTA GEOGRAFICA Y TURISTICA DE LA REGION DE VILLA DE LEYVA BOYACA - COLOMBIA

Por: Germán Puerto Restrepo Agosto 24/79, Bogotá

© Rick Darrington, Bogotá, 1981, 1982, 1983, 1984, 1985, 1986, 1987, 1988, 1989, 1990, 1991, 1992, 1993, 1994, 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011, 2012, 2013, 2014, 2015, 2016, 2017, 2018, 2019, 2020, 2021, 2022, 2023, 2024, 2025



# Site Survey

The site survey is paramount for a successful install

- Besides the previously listed tools, a digital camera will help in the documentation process and facilitate the work should another team undertake the install
- Spotlights and mirrors may be used in long distance links
- A balloon may also be useful to verify line of sight and the height of the required tower



# Site Survey

Site survey means working in roofs and elevated structures

- Remember to wear a hat, sunglasses and sunscreen
- Gloves and harness are a must for climbing towers
- Plan ahead for the permits to access roofs and ladders, find out who has the keys



# Requirements for the base station mounting structure

- Location of the base station is by far the most important consideration, in order to have the best coverage.
- Access to the power grid, security of the equipment and accessibility of the site come next





## Requirements for the base station mounting structure

- Sometimes an existing tower can be used for the new install, if an agreement with owner can be arranged
- The alternative is to build a supporting structure of your own





# Antenna Mount Options

Free standing Pole

Side Mount

Roof Mount

Penetrating

Non Penetrating

Climbable tower

Guyed

Self Supporting






# Free standing pole



Often it is less expensive than a tower, and can be built by attaching foot rests to any sizable pipe



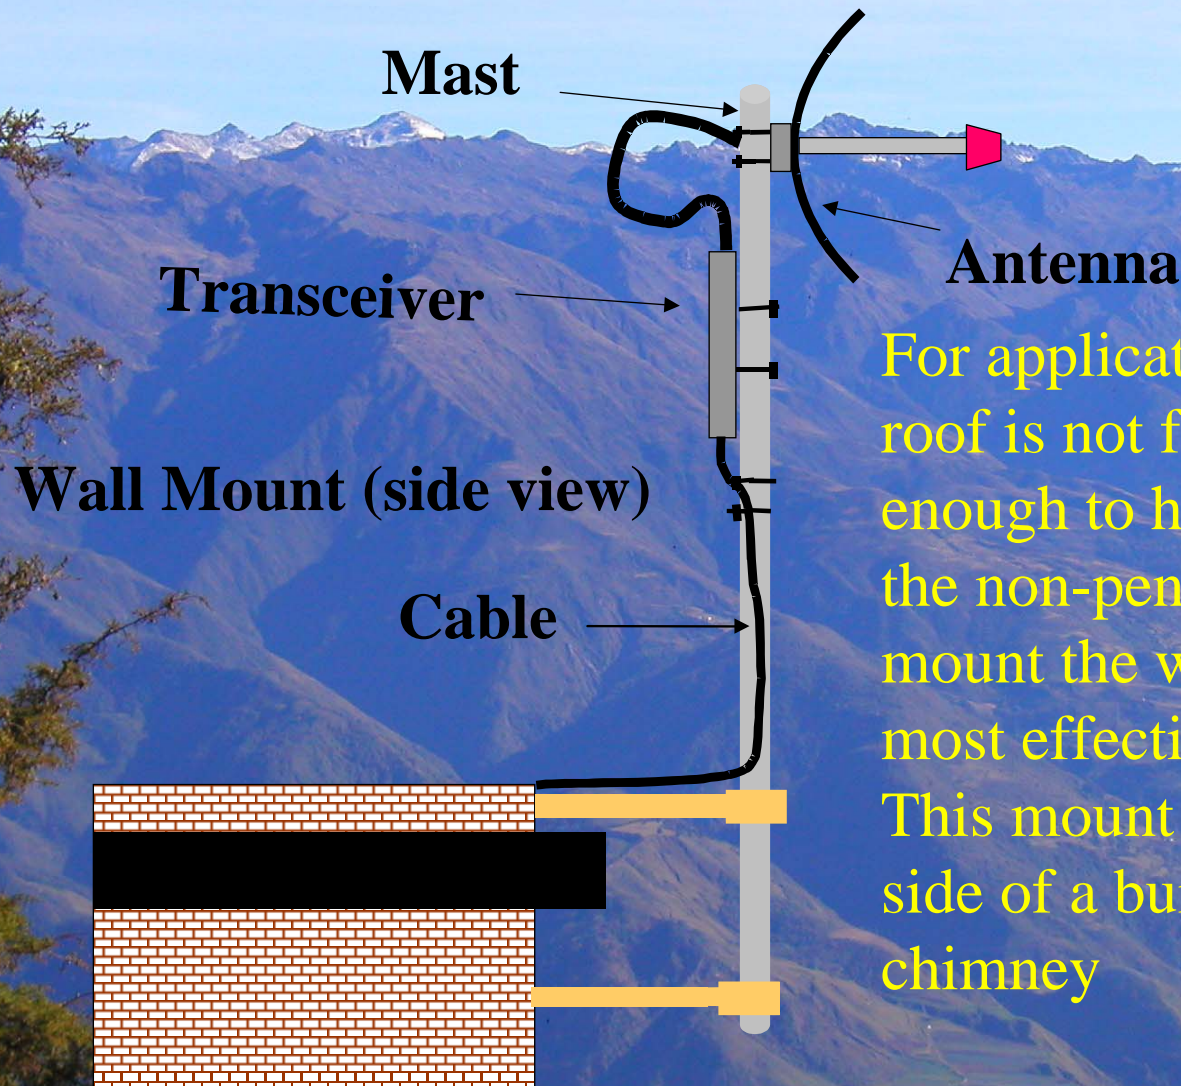

For applications where the roof is not flat or strong enough to hold the weight of the non-penetrating roof mount the wall mount is the most effective solution. This mount is affixed to the side of a building, wall or chimney.




# Wall mount

- The structure must be capable of handling the weight of the mast, antennas, and transceiver plus wind loading stress.
- This type of mount requires drilling four holes into the structure.
- When mounting to masonry, expansion type bolts or lead anchors should be inserted into the hole drilled as a means of attaching the mounting bracket to the structure.



# Non Penetrating Rooftop Mount

At least 4 cement blocks (to be used as ballast) or equivalent, are also required.  
1 piece of 90 cm x 90 cm rubber padding can be placed under the assembly to provide roof protection.

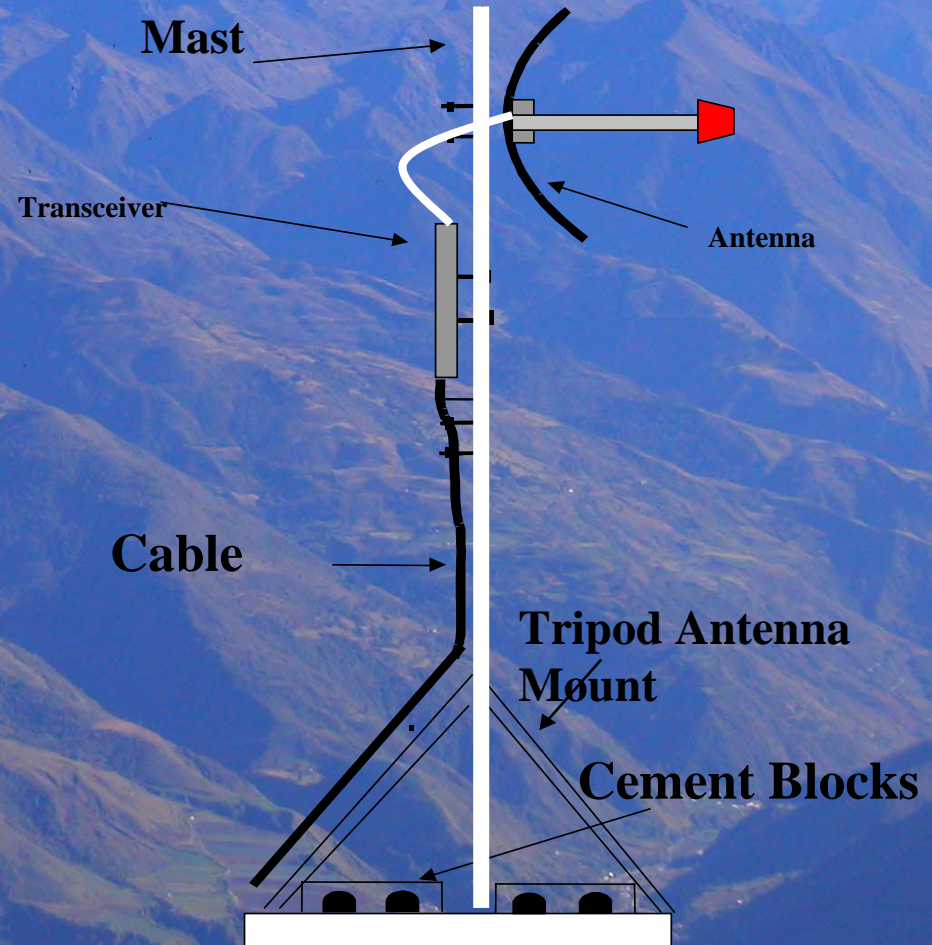



# Non penetrating mount example

This home made example can be fitted with containers filled with water or sand to increase wind resistance





# Penetrating Roof Mount

Care must be taken in order to prevent water from seeping in through the attachment bolts





# Guyed Tower

- A climbable tower is normally made of aluminum with a triangular cross section, about 30 cm per side.
- Each section is about 3 m long and several sections can be bolted together to attain the required height
- The tower must be properly guyed to withstand the expected wind in the area, as well as to support the weight of the equipment and one person





# Security



Always use a  
harness  
securely  
attached to the  
tower when  
working at  
heights



# Security



- Many countries require special training for people to be allowed to work on towers above a certain height
- Avoid working on towers during strong winds or storms



# Security



A lightning rod is a must for any structure elevated above the surrounds.

An inexpensive solution is to use a grounding rod properly connected to ground. Towers should also be fitted with warning lights and painted white and red for added visibility



# Erecting a tower with a pulley



- A pulley attached to the top of a pole will facilitate the tower installation
- The two tower sections are attached with an articulated joint



# Use tensors and proper fittings for the guy wires





# Self Supporting Towers

- Self supporting towers are expensive but sometimes needed for the Base Station
- An existing tower can sometimes be used for subscribers, although AM Transmitting station antennas should be avoided because the whole structure is active.
- FM station antennas are O.K.





# Base Station Antennas Mounting Considerations

The first choice for a base station is an omnidirectional antenna.

An omni will provide maximum coverage for your money.

Unfortunately, the best location for the omni antenna is at the top of the tower.


Very often this location is already taken so one must resort to attach the omni to one side of the tower.






# Area of coverage

Base Station with antenna set to 0 degrees take off angle

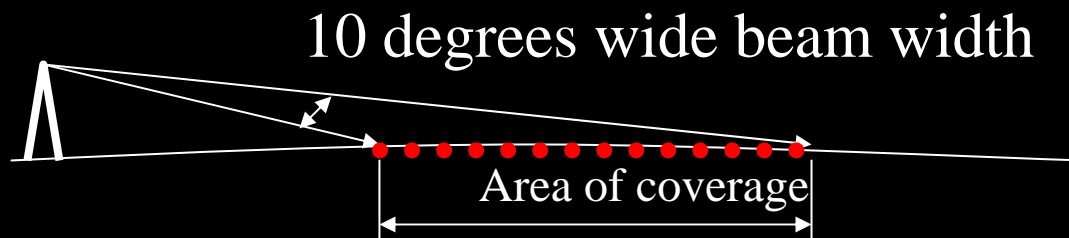


Base Station with antenna set to -10 degrees take off angle

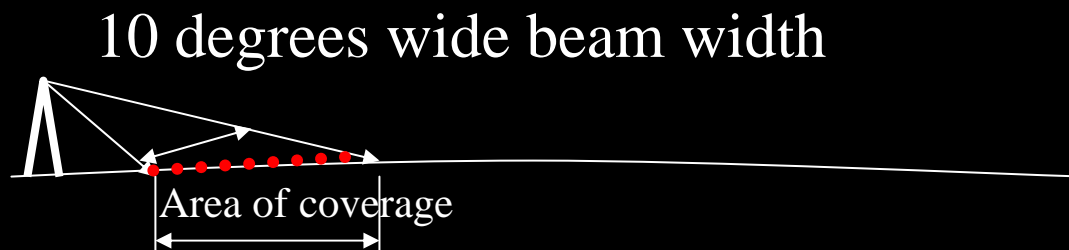



# Area of coverage

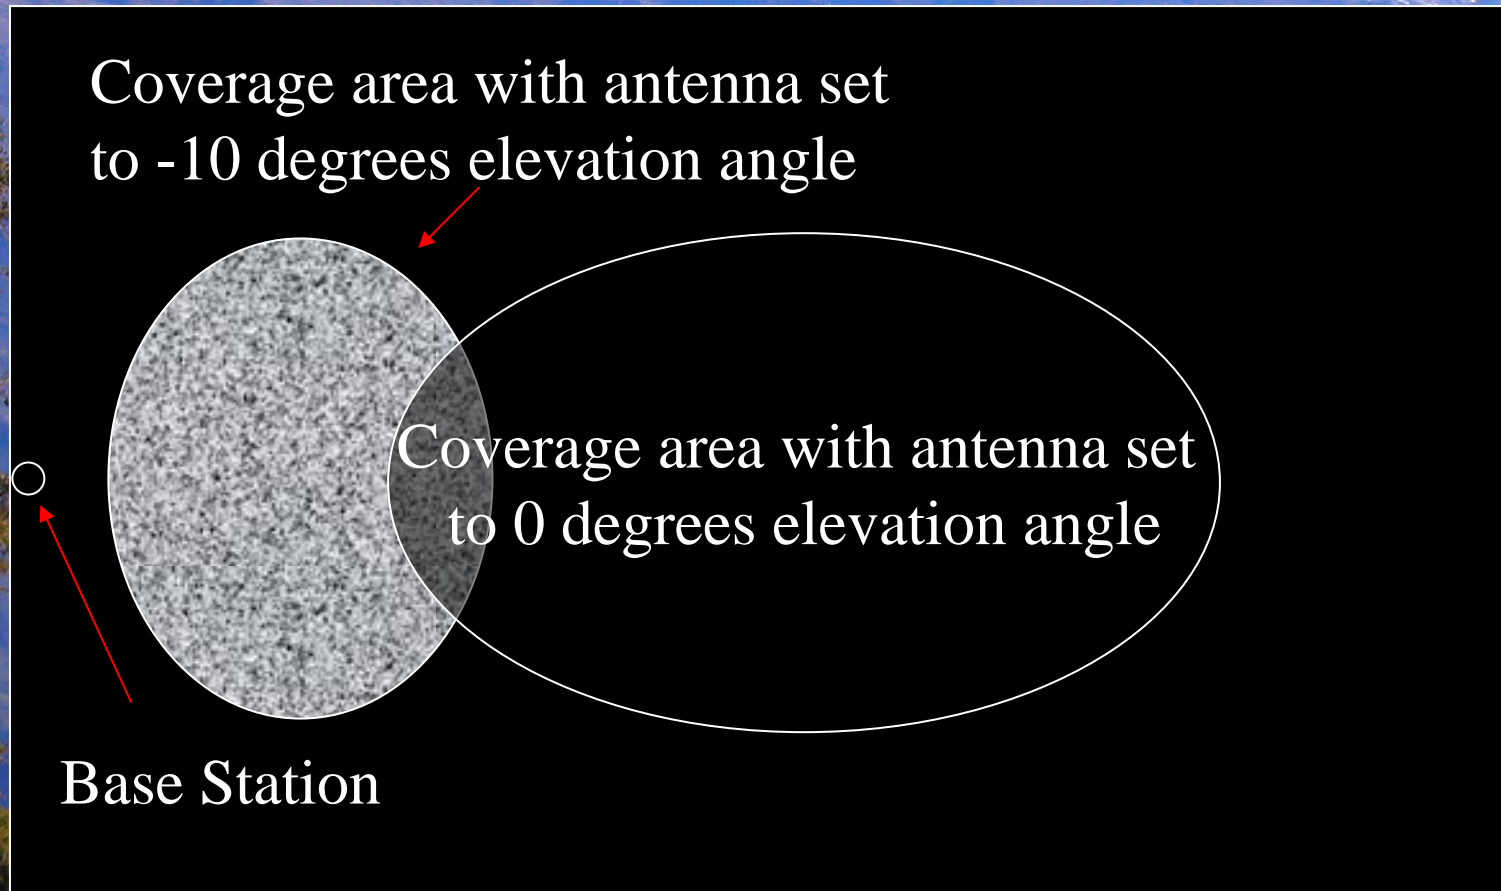



# Base Station Antennas Mounting Considerations

Omni antennas have 3 basic specifications:

- VSWR
- Vertical radiation pattern
- Horizontal radiation pattern.

Any nearby metal object will affect all of these



# Base Station Antennas Mounting Considerations

This is easy to understand if one considers the functioning of a Yagi-Uda antenna:

We have only one active element, but the addition of the reflector and the directors will affect the gain.

So any conducting object that is spaced from our antenna less than 2 wavelengths will affect the performance





# Base Station Antennas Mounting Considerations

## VSWR

A sizable conducting object will reflect part of the signal.

Radio hams some times tune the VSWR of an antenna by changing its distance from the tower.

A number of coaxial cables or waveguides can constitute a big enough reflector.

Separating the antenna at least 25 cm will be enough to overcome this effect at 2.4 GHz






# Base Station Antennas Mounting Considerations

## Horizontal Radiation Pattern

The horizontal pattern of an omni approaches a circle. A small pipe near the antenna can act as a director or reflector, changing the gain up to 3 dB in certain directions, thus disrupting the radiation pattern. A sizable object like the back of a parabola can completely block the signal in a given direction

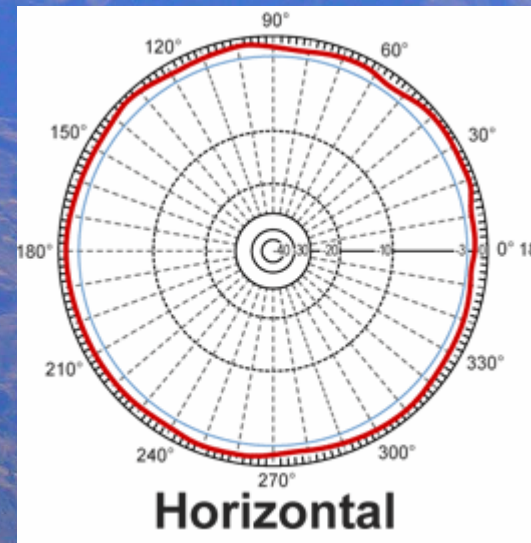




# Base Station Antennas Mounting Considerations

## Vertical Radiation Pattern

The gain of an omni is obtained by narrowing the vertical pattern.

This applies when the antenna is far from conducting objects, and constitutes a good approximation when the antenna is at the very top of the tower

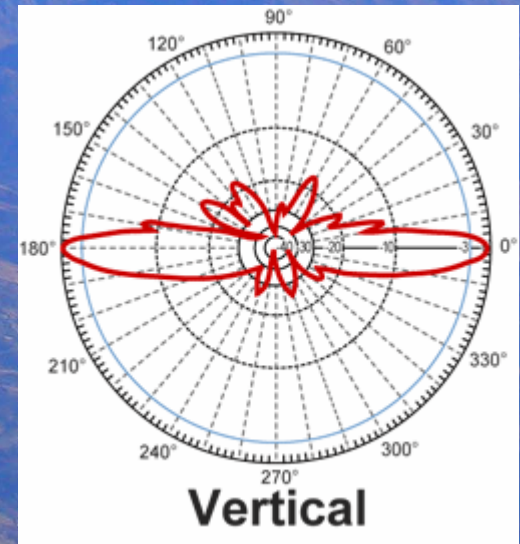



# Base Station Antennas Mounting Considerations

A self supporting tower very often has a tapered design, becoming narrower with height. This will up tilt the beam of a side attached omni up to 5 degrees. A typical 15 dBi omni has an 8 degree vertical beamwidth.

The beam can be tilted upwards so much as to send all the signal where it does no good.





# Base Station Antennas Mounting Considerations

Sectorial Antennas are less affected by the tower and can easily be downtilted.

This is particularly necessary when the subscriber is close to the base station or when the base station is much higher.

Mechanical downtilting can compensate for the effect of the structure.

Electrical downtilting can be accomplished by changing the phase of feeding elements.





# Subscriber Antenna Mounting Considerations

- Locate the antennas so that they have clear line of sight to the antennas at the opposite endpoint of the link.
- There should be no obstructions within  $\pm 10$  degrees azimuth of the antenna bore sight.





# Subscriber Antenna Mounting Considerations



Mounting the antennas close to the edge of the rooftop (on a flat top roof) helps to avoid problems with the latter requirement and with reflections. This should be done at the edge facing the air



# Subscriber Mounting Considerations

- Other considerations include proximity to the cable run to the rooftop.
- When locating the antenna mast it is desirable to have it in close proximity to the building rooftop ground system if present. It then becomes a simple matter to provide a short, low resistance, connection to the building ground system.



# Subscriber Mounting Considerations

- Conditions for microwave path design must be considered such as Earth curvature and Fresnel zone clearance.
- Observe local building and electrical codes when running all cables.



# Protect connectors from exposure

- Connectors should be protected with special tape or compound, since humidity cropping in is the main observed cause of CPE failures
- Cables should have dripping loops to prevent water getting inside the transceiver
- An inexpensive way to protect connectors is by means of inerttube rubber, this can be wrapped around the connector providing a non sticking, reusable protection\*

\*(patente pending)



# Typical Installation

## ■ Equipment

- ◆ Two or more radios
- ◆ Antennas (depend on install requirements)
- ◆ Antenna Mount (non penetrating, pole, wall mount, etc)
- ◆ COAX Cable 50 Ohm LMR400 or LMR 600
- ◆ Appropriate connectors
- ◆ Crimp and Soldering tools



# Typical Installation

- Make sure you follow local code and ord's
  - ◆ MTBR for down links can vary, have spare parts
- Do a free space loss calculation:  
$$L = 100,4 + 20 \log(\text{km})$$



# Typical Installation

- Do a “Test Install” first:
  - ◆ take a 2 m pole and attach a 24 dBi dish
  - ◆ connect to radio and search for other end
  - ◆ verify connectivity quality and strength
  - ◆ note general heading of antenna
  - ◆ note elevation (did you have to lift it up, etc)
  - ◆ now try antenna you plan to use



# Typical Installation

- Most important part of install (Antenna)
  - ◆ Make sure the mount is STRONG
  - ◆ Will NOT move in wind (antenna loads are high)
  - ◆ Well grounded, ground rod or similar
  - ◆ Cable is tied down with gentle sweeps
  - ◆ Lightning arresting equipment is grounded
  - ◆ Use a rubber mat for skids, to protect roof



# Typical Installation

- Keep COAX length S H O R T
  - ◆ No more than 15 meters
- Tape and secure ALL connections
- Use All Weather Tape
  - ◆ NOT Electrical tape or duct tape
- Use BLACK Nylon Ties
  - ◆ White ones will break down in UV
- If able, place COAX in conduit for protection



# Summary

- Location of the base station antenna is paramount for good coverage
- If available, sharing an existing structure can be very convenient
- Non penetrating roof top mounts are preferred
- Guyed towers are cost effective and can be locally manufactured
- Grounding and lightning protection required for a successful operation